

DB3

Transformer Balanced Direct Box




Features

- ▶ Professional, multi-functional DI box for all live and studio applications
- ▶ Ultra-flat frequency response
- ▶ Rugged metal housing with tough rubber corners for protection
- ▶ Internal battery automatically de-couples when using phantom power
- ▶ Low noise op amps for superior sound
- ▶ Gold-plated XLR connectors and phone jacks for input and link output

Description

Phonic's DB3 is an ultra-rugged Direct Box for performers in large venues. DB3 accepts a wide range of unbalanced signals, and processes these signals to be fed safely to mixers - making the DB3 one of the most essential tools in any live performance! Protect your system, protect your sound! The DB3 is something you won't want to do without!

Dimensions

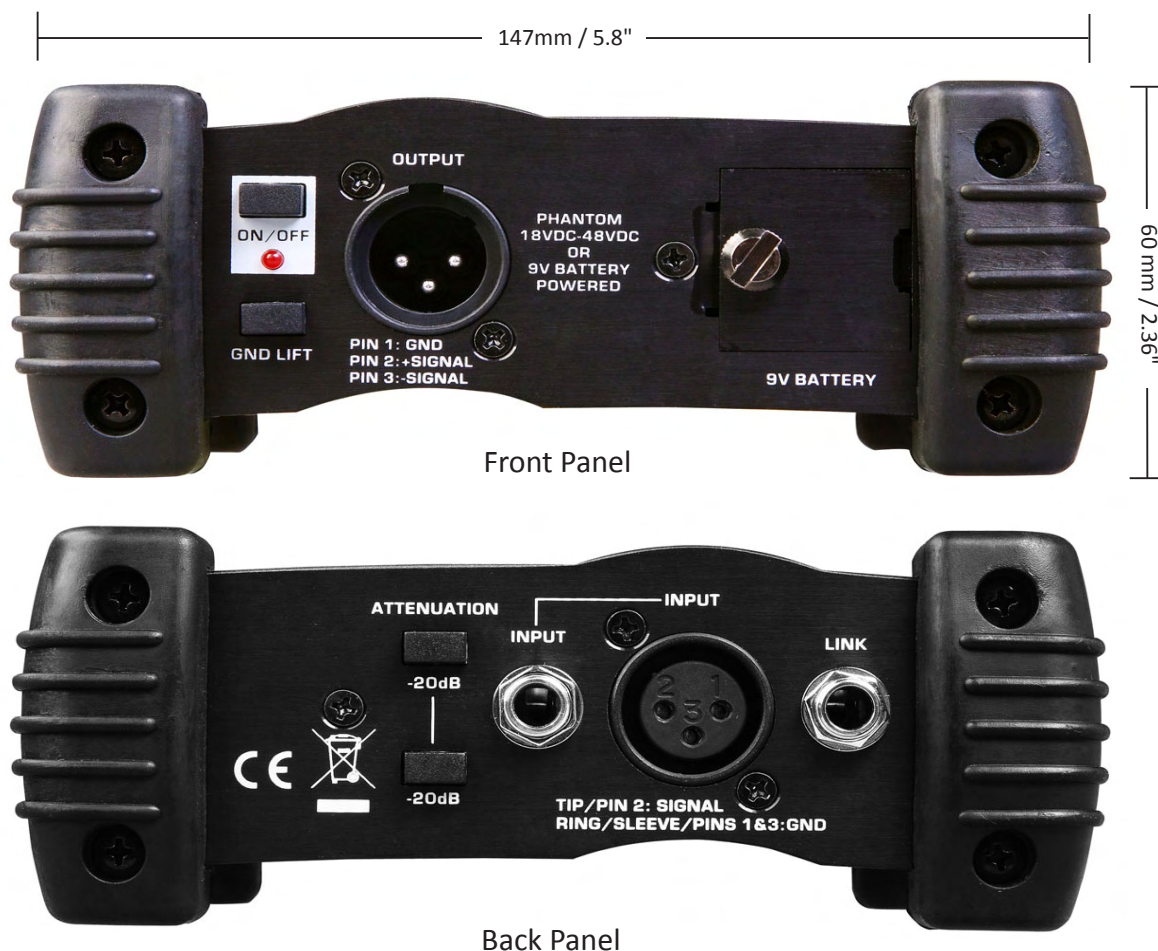

Specifications

Frequency Response	10 Hz to 93 kHz
Noise Level	-110 dBu
THD+N @ 1kHz / 0dBu	<0.005%
Input Impedance	>250 kOhm
Load Impedance	>600 Ohm
Inputs	1/4" jack unbal. In/link Out
Output	XLR unbalanced in
Maximum Input Level	+10/+30/+50 dBu
Power Supply	
Phantom Power	18 V DC to 48 V DC
Battery	9V blockcell 6LR91
Dimensions (HxWxD)	2.36" x 5.79" x 4.88" (60 x 147 x 124 mm)
Weight	0.75(lbs)